



CAUTION - THIS PROJECT REQUIRES CONSTRUCTION WORK IN, AROUND, AND OVER HAZARDOUS AND UNPROTECTED MINE SHAFTS, STOPES, ADITS, HIGHWALLS AND OTHER FEATURES WHICH MAY BE UNSTABLE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THOROUGHLY INVESTIGATING THE SITE CONDITIONS AND SCHEDULING EQUIPMENT, EQUIPMENT OPERATORS, OPERATIONS, PERSONNEL AND SAFETY PROCEDURES TO PREVENT ACCIDENTS AND INJURIES.

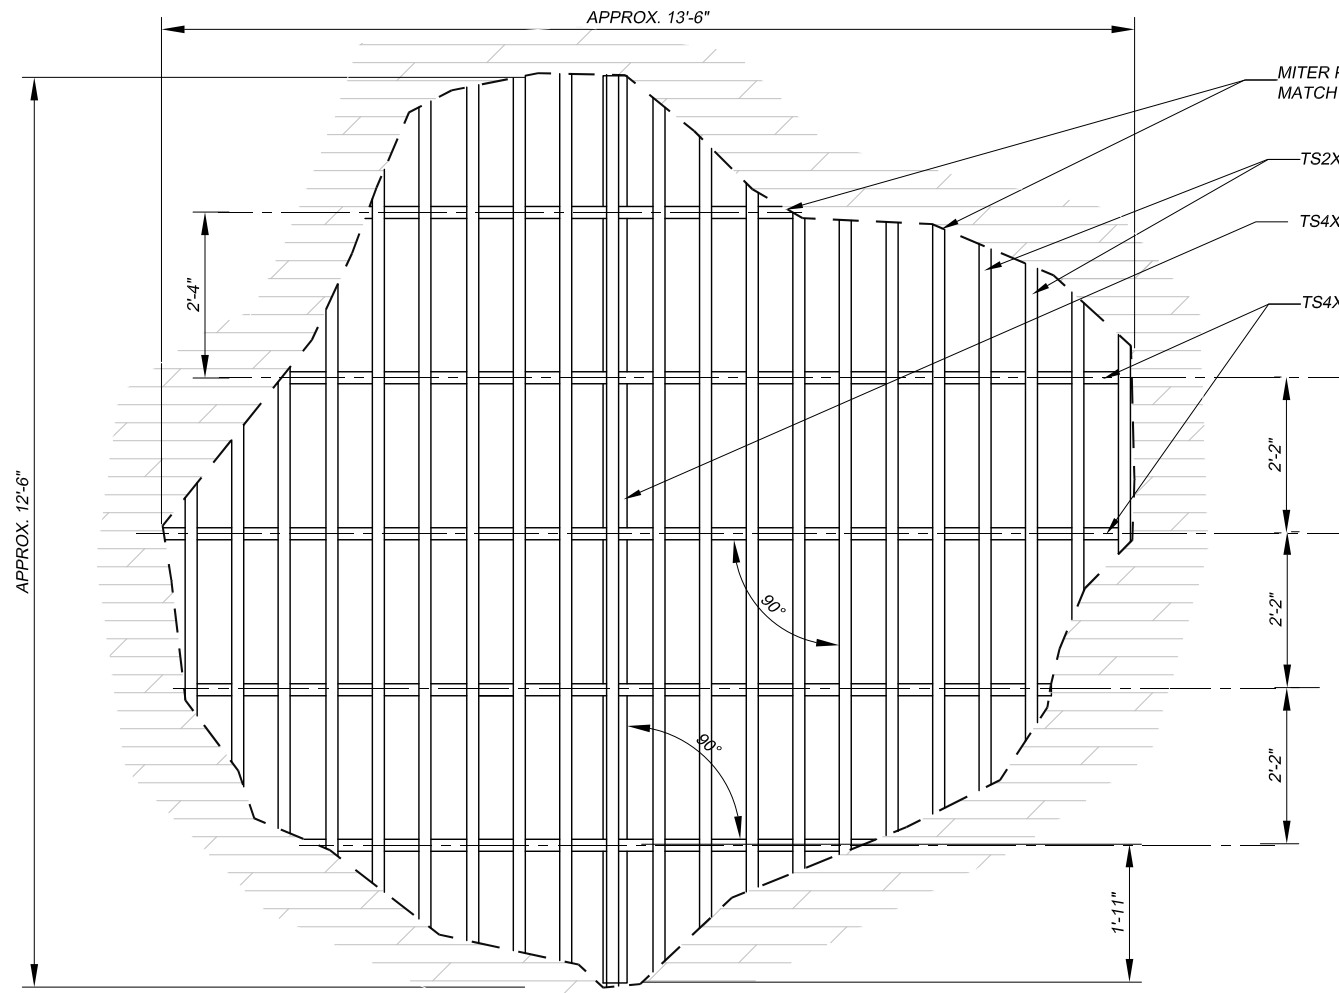


SECTION A-A

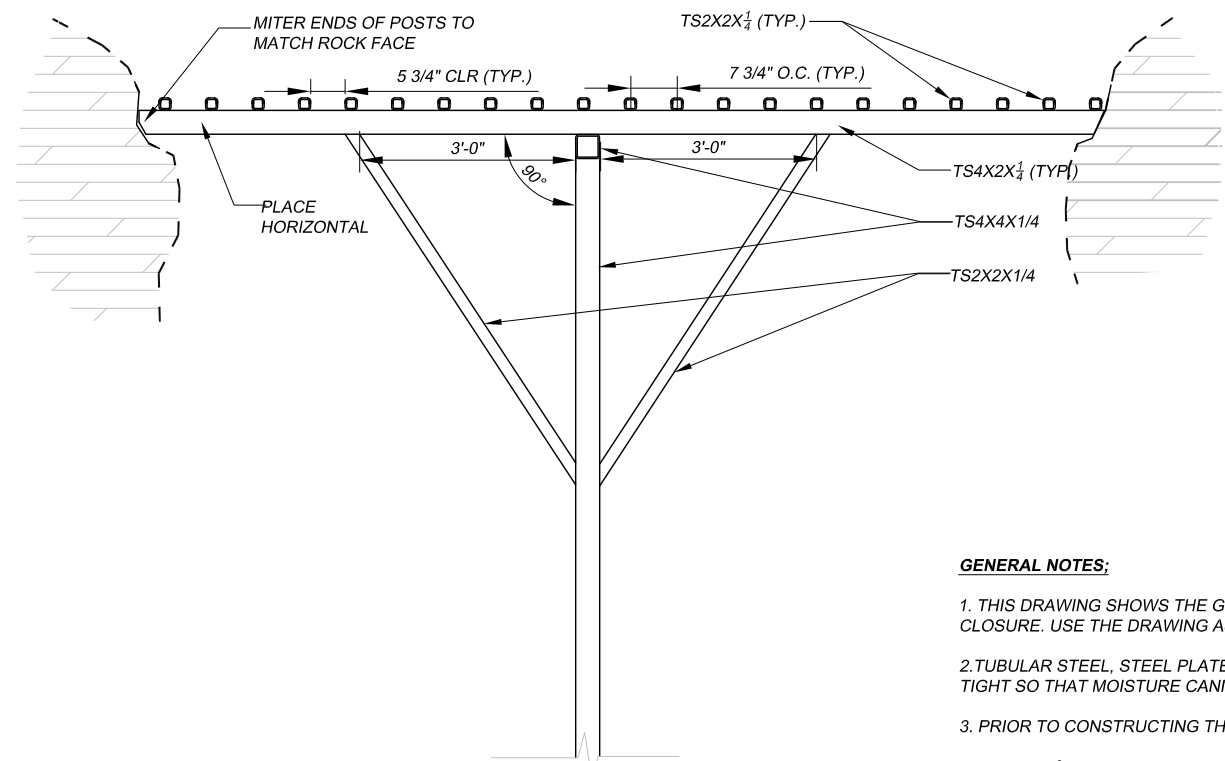

SECTION B-B

MITER POSTS TO CLOSELY MATCH ROCK FACE
 TS2X2X1/4 (TYP.)
 TS4X4X1/4
 TS4X2X1/4 (TYP.)

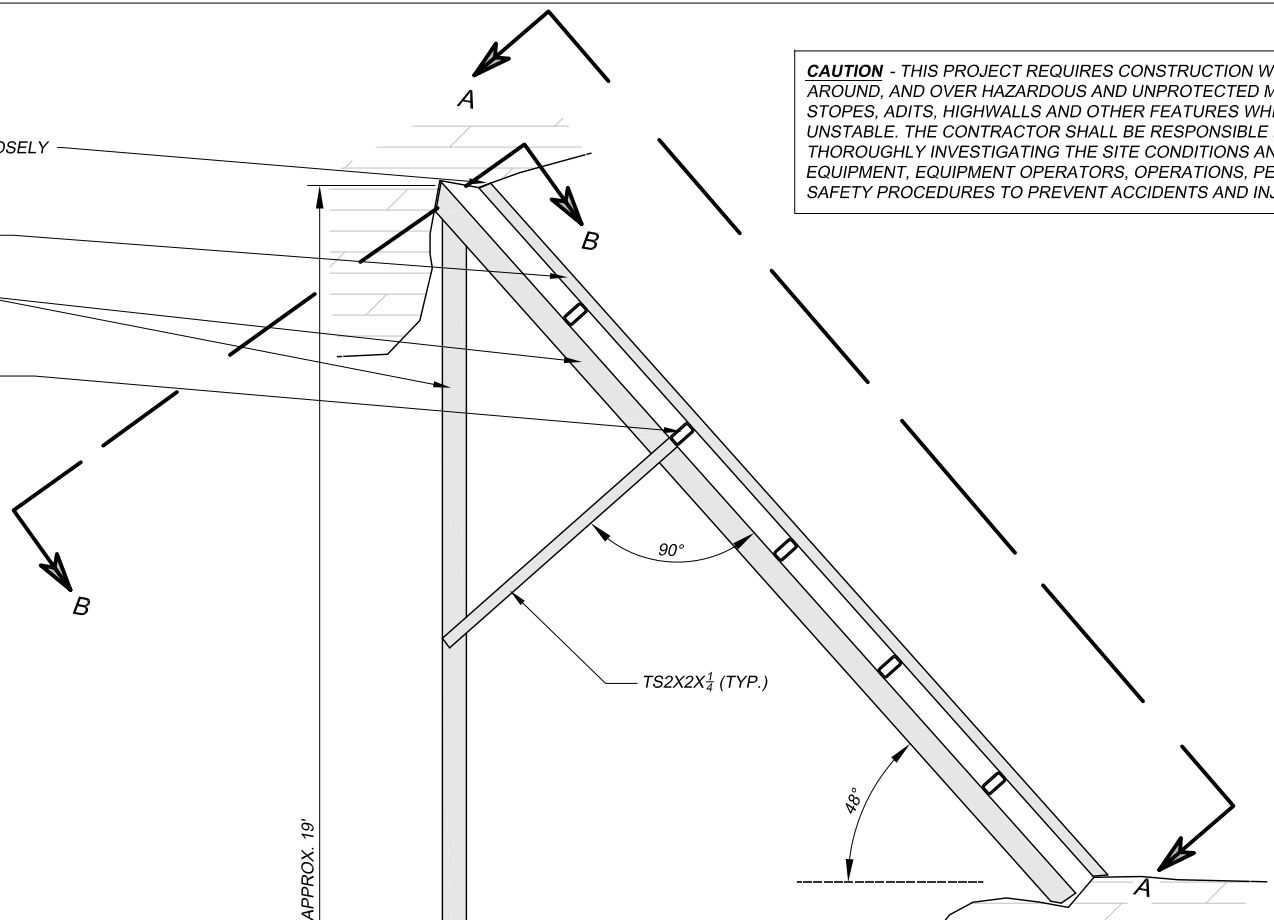

PROFILE VIEW - SECTION

2'-2'x1' MIN. CONCRETE FOOTER
 ONE 3/4" Ø, 1' LONG, STEEL ROD INSERTED 6" INTO BEDROCK AND WELDED TO POST
 DRILL 3/4" Ø HOLES INTO BEDROCK - 6" DEEP (3 TOTAL)
 TWO 3/4" Ø STEEL RODS INSERTED 6" MIN. INTO BEDROCK AND 6" INTO FOOTER
 CLEAR ALL LOOSE DEBRIS PRIOR TO POURING FOOTER
 2'-0" SQ.
 1'-4"
 2" CLR. (TYP.)

GENERAL NOTES:

1. THIS DRAWING SHOWS THE GENERAL SHAPE AND APPROXIMATE PROFILE OF THE STOPE AT THE INTENDED LOCATION OF THE CLOSURE. USE THE DRAWING AS A GUIDE FOR FIELD LAYOUT OF THE CLOSURE. FIELD VERIFY DIMENSIONS PRIOR TO FABRICATION.
2. TUBULAR STEEL, STEEL PLATES, AND SHAPES SHALL BE WEATHERING STEEL AS SPECIFIED. WELD ALL JOINTS. JOINTS SHALL BE TIGHT SO THAT MOISTURE CANNOT ENTER BETWEEN PLIES OF MATERIAL. ROUND OR CHAMFER ALL SHARP EDGES AND CORNERS.
3. PRIOR TO CONSTRUCTING THE FOOTER, REMOVE RUBBLE TO BEDROCK.
5. PLACE A 3/4" CHAMFER ON ALL EXPOSED EDGES OF CONCRETE FOOTER.
6. TOLERANCES ON THE CENTER-TO-CENTER DIMENSIONS BETWEEN POSTS SHALL BE ±1/8".

ABANDONED MINE LAND PROGRAM MINING AND MINERALS DIVISION ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT		
SCALE: 3/8"=1'-0"		DRAWN BY: JTG
DATE: SEPT. 29, 2010		REVISED:
FEATURE 1 STOPE		
Harding Pegmatite Mine Safeguard Project		DRAWING NUMBER: FIGURE 11