



ELEVATION
SCALE: 1/2"=1'-0"

SEE FIGURE 4 FOR POST LOCATIONS

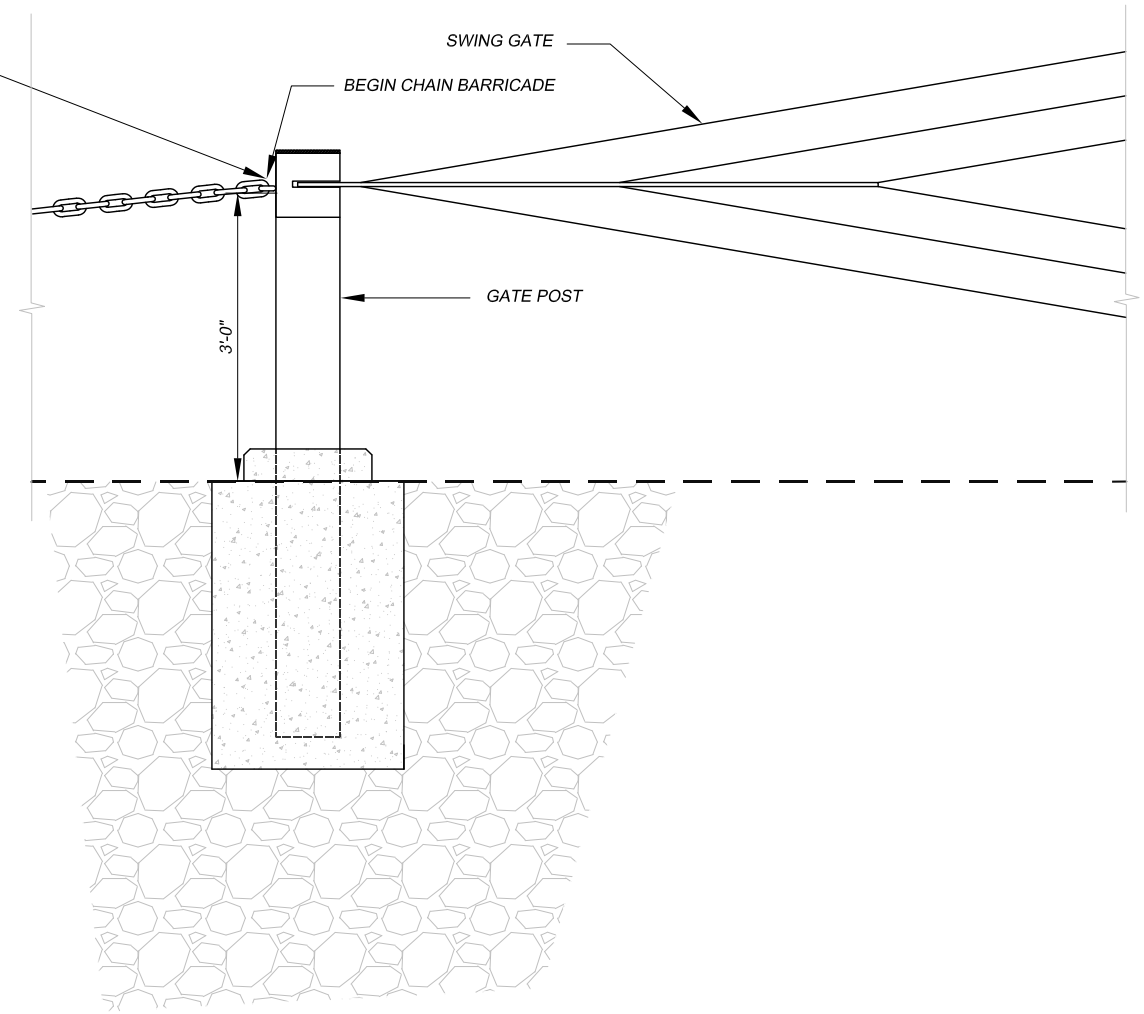

GENERAL NOTES:

- DISPOSE OF EXCESS MATERIAL FROM THE POST EXCAVATION IN THE PARKING LOT FILL AREA OR AS DIRECTED BY THE AML PROJECT MANAGER.
- TUBULAR STEEL, STEEL PLATES, AND SHAPES FOR THE GATE AND POSTS SHALL BE WEATHERING STEEL AS SPECIFIED. WELD ALL JOINTS. JOINTS SHALL BE TIGHT SO THAT MOISTURE CANNOT ENTER BETWEEN PLIES OF MATERIAL. ROUND OR CHAMFER ALL SHARP EDGES AND CORNERS.
- INSTALL 14 POSTS PLUMB AND AS SHOWN (ALSO SEE FIGURE 4). LOCATE POST BASES APPROXIMATELY 1.5' - 2' FROM EDGE OF PARKING LOT AND AS DIRECTED BY AML PROJECT MANAGER. CHAIN SHALL BE 5/8" GRADE 43, ZINC PLATED.
- COMPLETELY FILL INSTALLED POSTS WITH CONCRETE OR GROUT AND CROWN THE TOP AS SHOWN.
- PLACE A 3/4" CHAMFER ON ALL ABOVE GRADE EDGES OF CONCRETE.
- AFTER INSTALLATION OF THE POSTS, GRADE THE AREA BETWEEN THE POSTS LEVEL AND TIE IN SMOOTHLY WITH THE SURROUNDING TERRAIN.

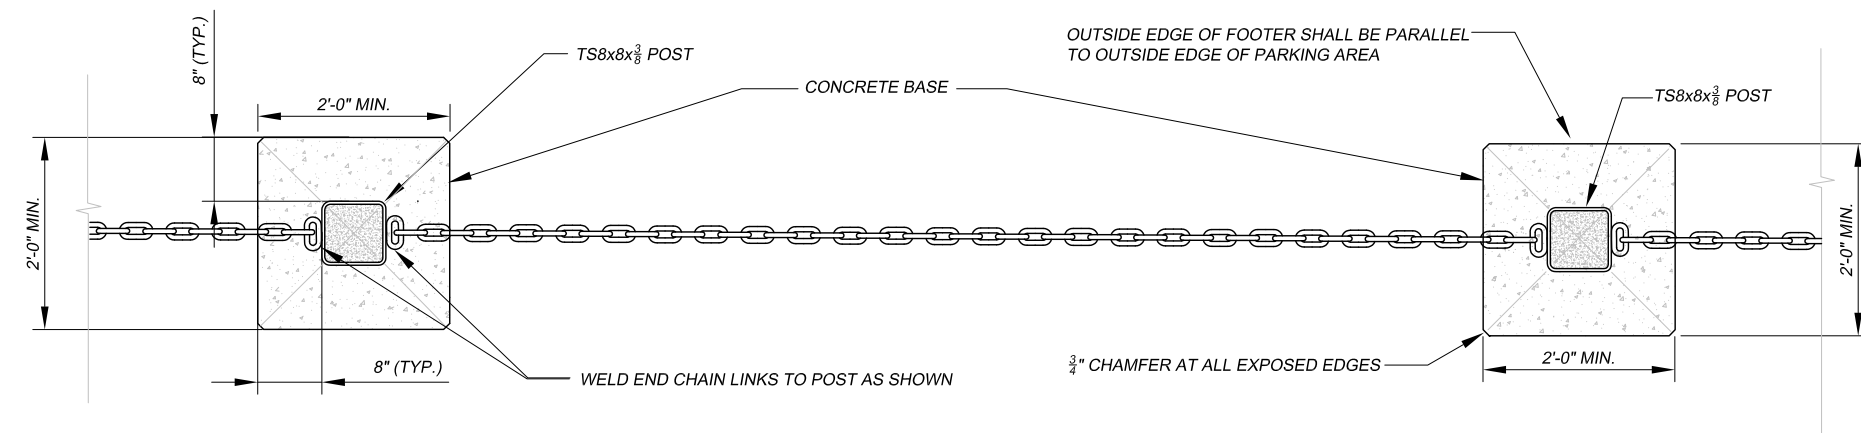

PLAN VIEW OF POSTS
SCALE: 1/2"=1'-0"

ABANDONED MINE LAND PROGRAM MINING AND MINERALS DIVISION ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT		
SCALE: AS SHOWN		DRAWN BY: JTG
DATE: OCT. 5, 2010		REVISED:
POST AND CHAIN BARRICADE		
Harding Pegmatite Mine Safeguard Project		DRAWING NUMBER: FIGURE 5